



**WHAT'S
BEHIND
YOUR
WALK-IN
DOOR?**




BALLY HAS THE TOUGHEST DOOR IN THE INDUSTRY.

sales@ballync.com
www.ballyrefboxes.com

1-800-24BALLY

Bally doors use the same construction as our panels: non ozone-depleting rigid insulation, foamed-in-place and securely bonded to metal skins for tremendous structural strength. A reinforced U-channel steel frame with a thermal breaker prevents twisting, sagging, and eliminates the need for structural members.

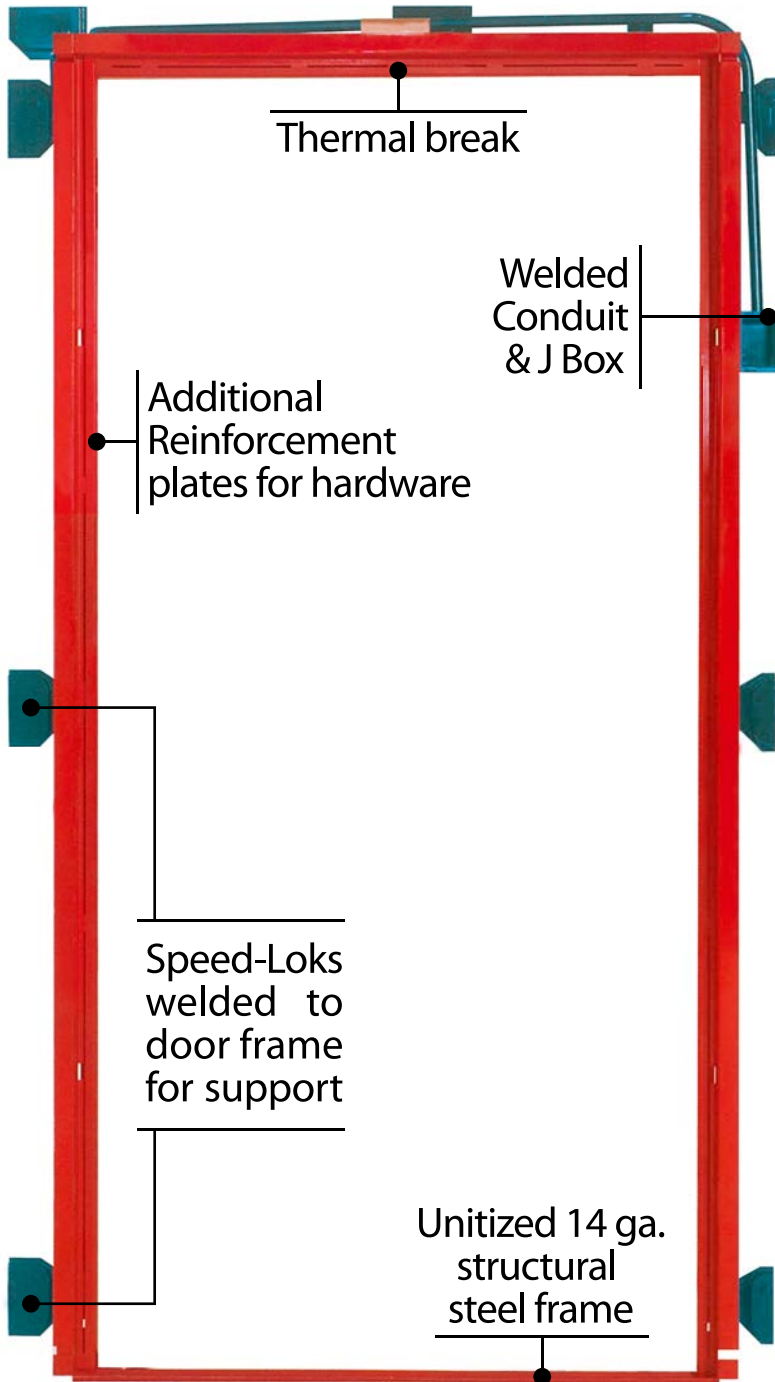

- The durability of our construction creates an exceptionally lightweight door.
- Bally doors include a fingertip-touch latch with lock set; a magnetic gasket provides a snug seal.
- Heater wires, concealed in the perimeter of our door jambs, prevent condensation or frost formation.
- Offcenter doors in frames available.
- Bally offers a wide selection of sizes, models, and options to give you the door you need.

Widths:

46": 24", 30", 34", 36" openings

57½": 36", 42", 48" openings

69": 36", 42", 48", or 60" openings

Heights: 6'10", 7'10"

Thicknesses: 4", 5", 6"

Consult factory for details. 4'9½" door panel available for 30", 36", 42", and 48" door openings requiring special locations. For 6' 6" Walk-Ins, 5'6" high door openings can be supplied. Partition door panels, when used with floor panels, are identical to exterior door panels except that the stepplate is flush. For Walk-Ins higher than 8'6", an additional filler wall panel is used above an 8'6" high door panel.



Proudly manufactured in the U.S.A.
Bally Refrigerated Boxes, Inc. © 2013

1-800-24BALLY
sales@ballync.com
www.ballyrefboxes.com