



# REPLACEMENT BALLY DOORCAP ORDER FORM

Please provide all information listed below.  
 Email it to **parts@ballync.com** or **parts@ballypa.com**  
 Fax it to Morehead City, NC **(252) 240-0871**  
 Fax it to Bally, PA **(610) 702-2211**

If you have any questions call **800-242-2559** or **800-344-9302**.

|          |      |                |  |
|----------|------|----------------|--|
| Name:    |      | Business Name: |  |
| Address: |      | Phone:         |  |
| City:    |      | Fax:           |  |
| State:   | Zip: | Email:         |  |

IF THE DOOR CAP YOU ARE REPLACING IS NOT A BALLY DOOR USE THE ADAPT-A-DOOR ORDER FORM. USE THESE STEPS AND THE DIAGRAM ON THE NEXT PAGE TO HELP YOU FILL IN INFORMATION.


## INSTRUCTIONS

1. A - The exterior width of the door.
2. B - The overall thickness of the door.
3. C - The height of the door cap from top to bottom; outside to outside excluding the wiper gasket.
4. D - The height of the door including the bottom wiper gasket.
5. E - The location of the door closer measuring from the hinge side of the door.
6. F - The location of the top hinge measuring from the top of the door to the center of the door hinge.
7. G - From the center of the middle hinge to the bottom of the door.
8. H- From the center of the bottom hinge to the bottom of the door.
9. I - From the center of the latch to the bottom of the door.
10. Select the finish of the door.
11. Select the swing of the door (*facing the door, what side of the door are the hinges on?*)
12. Optional add-ons if needed (*if they are not marked they will not be on the door*).
13. Model and serial number (*Step inside of the unit turn around face the door frame there should be a tag by the vapor-proof light with this information.*)

**\*\*NOTICE: OPEN PACKAGE AND INSPECT DOOR FOR DAMAGE!  
 NOTE ANY DAMAGE ON CARRIER RECEIPT BEFORE SIGNING!!!**

Serial #:

Model #:

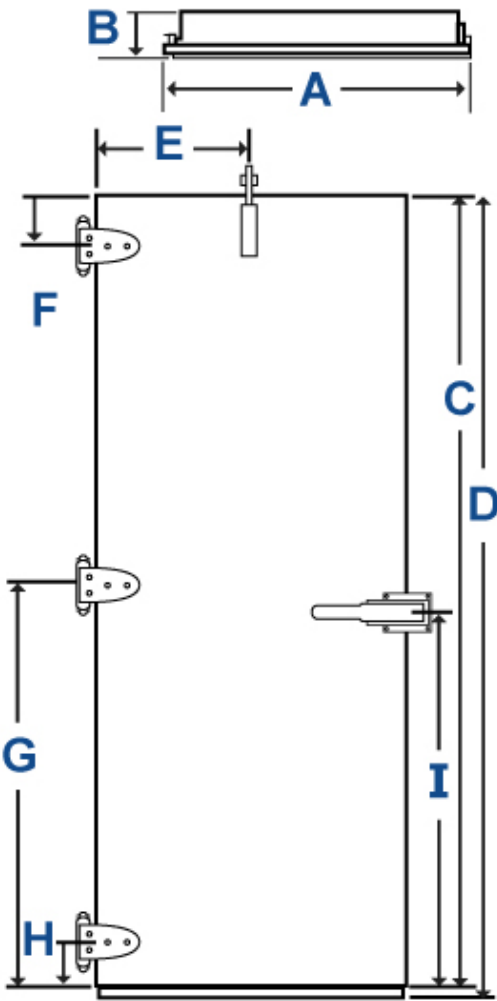

**DIMENSIONS**

A:

B:

C:

D:

E:

F:

G:

H:

I:

**REQUIREMENTS**

Finish (Choose one):

- 22 Gauge Stainless Steel (Standard)
- 20 Gauge SS (Heavy Duty)
- 18 Gauge SS (Super Duty)
- Embossed Aluminum
- Embossed White Galvanized
- Smooth White Galvanized
- Smooth White Aluminum
- Embossed Galvalume

Swing (Choose one):

- Right (Hinges on the right side)
- Left (Hinges on the left side)

**COMMENTS:**

**OPTIONS**

- Hardware (hinges & latch)
- Door Closer
- Kickplate (Choose one of each):
  - 1/8" Diamond Tread
  - Interior only
  - Stainless Steel
  - Exterior only
  - Rigidized Stainless Steel
  - Both

The following options require a power cord.

- Observation Window (Standard 14x14)
  - (Circle one): Interior OR Exterior Crossover Cord
- Pressure Relief Port
  - (Circle one): Interior OR Exterior Crossover Cord

**Note: Hardware Is Not Mounted By Bally. Must Be Mounted In Field. 1/4 - 20 Tap & 13/64 Drill Bit Is Required.**