



# REPLACEMENT BALLY DOORCAP ORDER FORM

Please provide all information listed below.  
 Email it to **parts@ballync.com** or **parts@ballypa.com**  
 Fax it to Morehead City, NC **(252) 240-0871**  
 Fax it to Bally, PA **(610) 702-2211**

If you have any questions call **800-242-2559** or **800-344-9302**.

Name:		Business Name:	
Address:		Phone:	
City:		Fax:	
State:	Zip:	Email:	

IF THE DOOR CAP YOU ARE REPLACING IS NOT A BALLY DOOR USE THE ADAPT-A-DOOR ORDER FORM. USE THESE STEPS AND THE DIAGRAM ON THE NEXT PAGE TO HELP YOU FILL IN INFORMATION.


**INSTRUCTIONS**

1. A - The exterior width of the door.
2. B - The overall thickness of the door.
3. C - The height of the door cap from top to bottom; outside to outside excluding the wiper gasket.
4. D - The height of the door including the bottom wiper gasket.
5. E - The location of the door closer measuring from the hinge side of the door.
6. F - The location of the top hinge measuring from the top of the door to the center of the door hinge.
7. G - From the center of the middle hinge to the bottom of the door.
8. H - From the center of the bottom hinge to the bottom of the door.
9. I - From the center of the latch to the bottom of the door.
10. Select the finish of the door.
11. Select the swing of the door (facing the door, what side of the door are the hinges on?)
12. Optional add-ons if needed (if they are not marked they will not be on the door).
13. Model and serial number (Step inside of the unit turn around face the door frame there should be a tag by the vapor-proof light with this information.)

**\*\*NOTICE: OPEN PACKAGE AND INSPECT DOOR FOR DAMAGE!  
 NOTE ANY DAMAGE ON CARRIER RECEIPT BEFORE SIGNING!!!**

Serial #:

Model #:

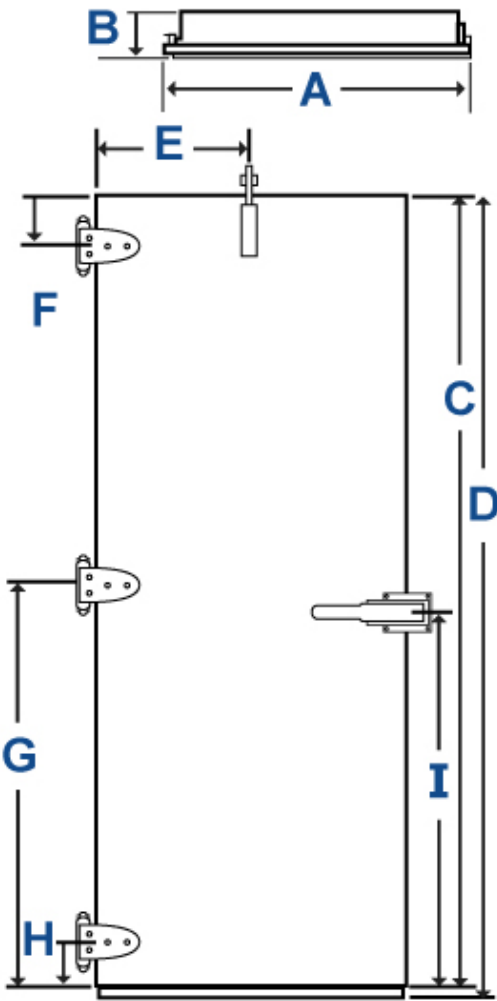

**DIMENSIONS**

A:

B:

C:

D:

E:

F:

G:

H:

I:

**REQUIREMENTS**

Finish (Choose one):

- 22 Gauge Stainless Steel (Standard)
- 20 Gauge SS (Heavy Duty)
- 18 Gauge SS (Super Duty)
- Embossed Aluminum
- Embossed White Galvanized
- Smooth White Galvanized
- Smooth White Aluminum
- Embossed Galvalume

Swing (Choose one):

- Right (Hinges on the right side)
- Left (Hinges on the left side)

**COMMENTS:**

**OPTIONS**

- Hardware (hinges & latch)
- Door Closer
- Kickplate (Choose one of each):
  - 1/8" Diamond Tread
  - Stainless Steel
  - Rigidized Stainless Steel
  - Interior only
  - Exterior only
  - Both

The following options require a power cord.

- Observation Window (Standard 14x14)
  - (Circle one): Interior OR Exterior Crossover Cord
- Heater
  - (Circle one): Interior OR Exterior Crossover Cord
- Pressure Relief Port
  - (Circle one): Interior OR Exterior Crossover Cord

**Note: Hardware Is Not Mounted By Bally. Must Be Mounted In Field. 1/4 - 20 Tap & 13/64 Drill Bit Is Required.**