


## Securing Ceiling Panels to Interior Open Web Steel

To simplify installation, Bally can provide ceiling panels for refrigerated buildings with the Speed-Lok holes on the exterior of the panel. This permits the ceiling panels to be placed directly on the supporting joist, eliminating Speed-Lok spacers.

It simplifies securing the panels to the structural steel by using a standard ceiling piece 'A' clip attached to the inside of the structure to a 20" piece 'B' (3.5" x 3.5") angle.

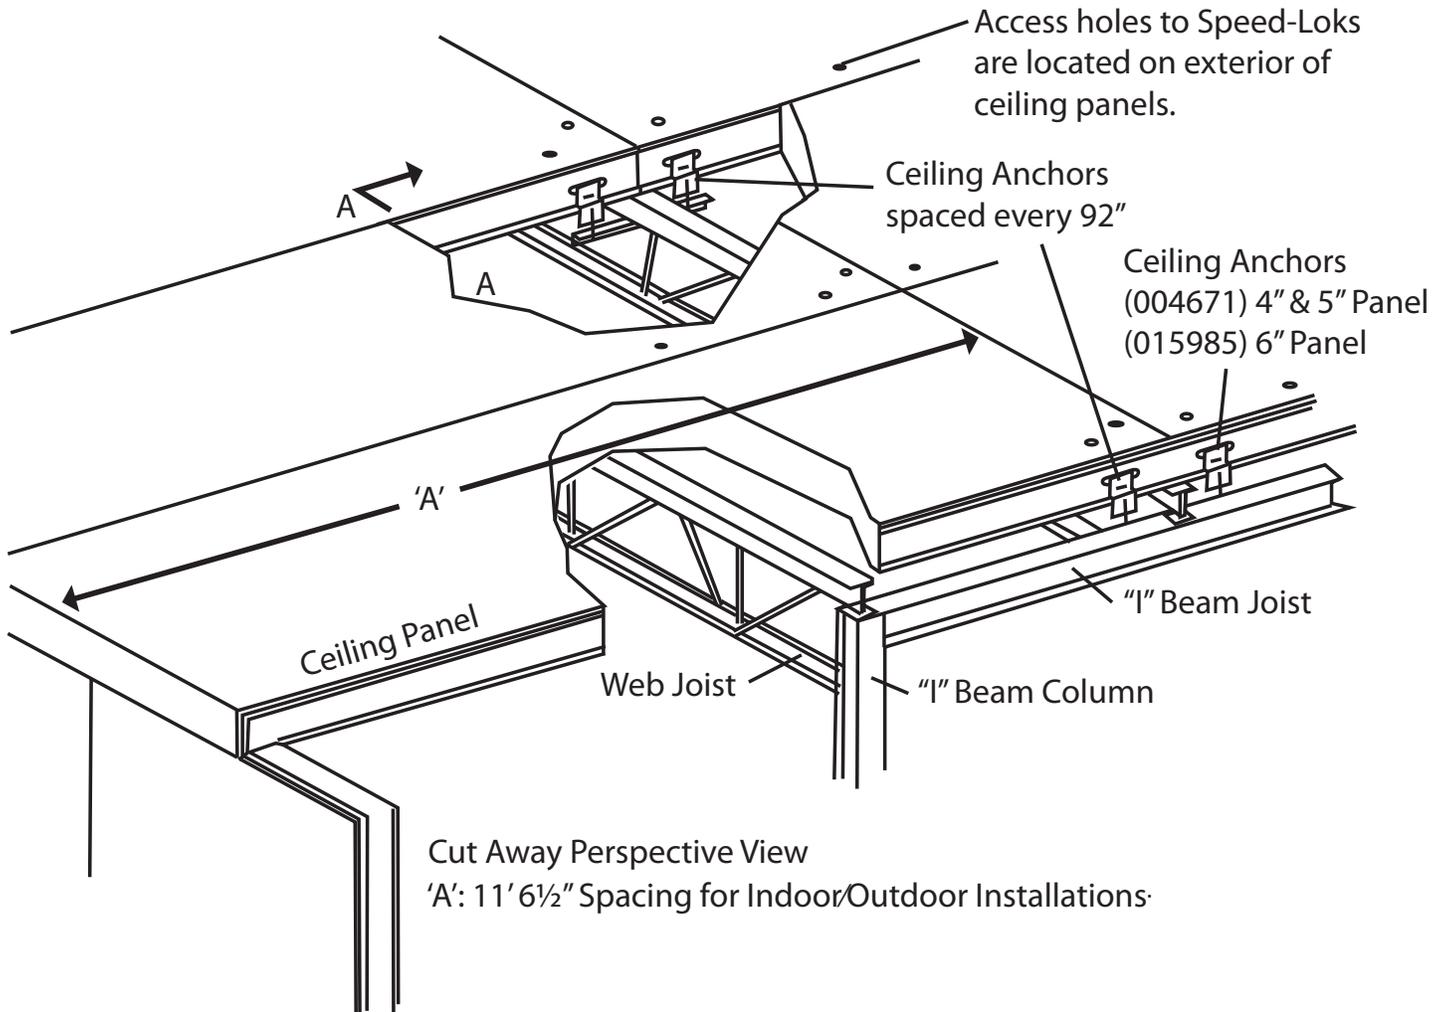

*Note: It is important NEVER to walk on top of a Bally ceiling that is not supported by interior steel or other temporary structural supports. Failure to support ceiling will cause joint failure and likely cause serious injury or death.*