


THE RHODES TIMER NEEDS TO STOP THE EVAPORATOR FANS AND TURN OFF THE SOLENOID VALVE WHEN SOMEONE ENGAGES IT. THIS IS ACHIEVED BY CONNECTING THE TIMER TO DIGITAL INPUT NUMBER "AUX2".

WIRE THE DIGITAL INPUT AS SHOWN BELOW. THE RHODES TIMER IS SHOWN WIRED NORMALLY OPEN (L1&T1). "AUX2" NEEDS TO BE PROGRAMMED AS "DOOR OPEN WHEN SWITCH IS CLOSED". SEE BELOW FOR PROGRAMMING STEPS.

IF PART OF A BONDED PAIR, ONLY ONE EVAPORATOR NEEDS TO BE WIRED.

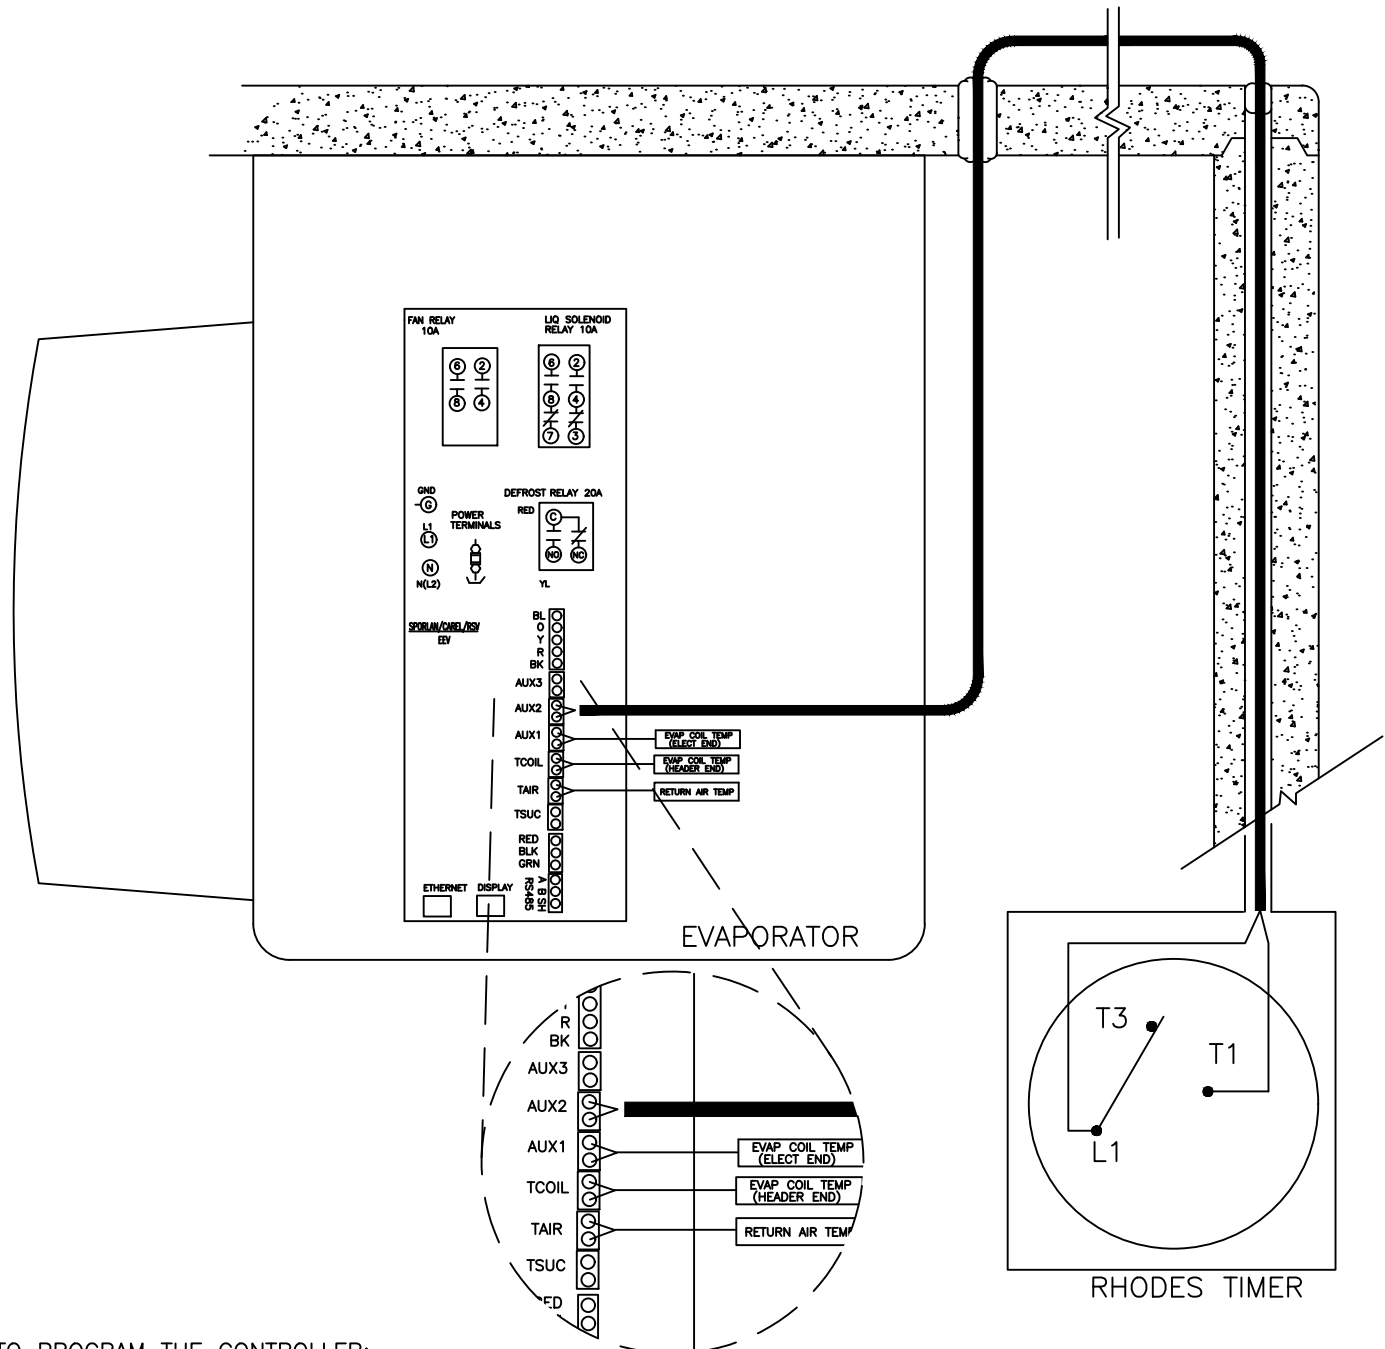

TO PROGRAM THE CONTROLLER:

- PUSH AND HOLD "BACK" FOR 5 SECS.
- PUSH THE "UP" BUTTON UNTIL THE SCREEN READS, "AU2" (19 TIMES).
- HIT "ENTER", AND THEN FIND AND SELECT "dor".
- PUSH & HOLD "ENTER" FOR 3 SEC'S.
- NEXT PUSH "DOWN" ONCE AND SELECT "A2A", SELECTING "cLo".
- PUSH & HOLD "ENTER" FOR 3 SEC'S.
- HIT "BACK" TWICE.